

Headquarter:

Add:Fuyang , Hangzhou , China.

R & D Center:

① Add: WuHou , Chengdu, China.

② Add: Yuhuatai, Nanjing , China.

Manufacturers:

①Add: Fuyang , Hangzhou, China.

②Add: Huangjiang , Dongguan, China.

Representative office:

Add: Longgang , Shenzhen, China.



FACEBOOK



SCAN & FOLLOW

Pls refer the actual products, the manual is subject to change without notice.

EQY Series

- Lens: 2.8mm/3.6mm optional
- Support coaxial audio
- Support human/face/vehicle detection with ADVR
- Waterproof: IP66
- Built in Mic&Speaker

Model	Lens	Light Board	Resolution	Coaxial audio
AHC-EQY5320PTA-IR2R-AT	2.8mm/3.6mm optional	Dual light	AHD/TVI/CVI: 1080P@25fps	Yes
AHC-EQY5350PTC-T-IR2R-AT	2.8mm/3.6mm optional	Dual light	AHD/TVI/5MP@20fps,5MP@12.5fps; CVI:5MP@20fps	Yes
AHC-EQY5380PS-IR2R-AT	2.8mm/3.6mm optional	Dual light	AHD/TVI/CVI: 8M@15/12.5fps	Yes
AHC-EQY5320PTA-D2-AT	2.8mm/3.6mm optional	Full Color	AHD/TVI/CVI: 1080P@25fps	Yes
AHC-EQY5350PTC-D2-AT	2.8mm/3.6mm optional	Full Color	AHD/TVI/5MP@20fps,5MP@12.5fps; CVI:5MP@20fps	Yes
AHC-EQY5380PS-D2-AT	2.8mm/3.6mm optional	Full Color	AHD/TVI/CVI: 8M@15/12.5fps	Yes

HX Series

- Lens: 2.8mm/3.6mm optional
- Support coaxial audio
- Transmission distance over 500 meters
- Support human/face/vehicle detection with ADVR
- Built in Mic&Speaker

Model	Lens	Light Board	Resolution	Coaxial audio
AHC-HX5320PTA-IR2R-AT	2.8mm/3.6mm optional	Dual light	AHD/TVI/CVI: 1080P@25fps	Yes
AHC-HX5350PTC-T-IR2R-AT	2.8mm/3.6mm optional	Dual light	AHD/TVI/5MP@20fps,5MP@12.5fps; CVI:5MP@20fps	Yes
AHC-HX5380PS-IR2R-AT	2.8mm/3.6mm optional	Dual light	AHD/TVI/CVI: 8M@15/12.5fps	Yes
AHC-HX5320PTA-D2-AT	2.8mm/3.6mm optional	Full Color	AHD/TVI/CVI: 1080P@25fps	Yes
AHC-HX5350PTC-D2-AT	2.8mm/3.6mm optional	Full Color	AHD/TVI/5MP@20fps,5MP@12.5fps; CVI:5MP@20fps	Yes
AHC-HX5380PS-D2-AT	2.8mm/3.6mm optional	Full Color	AHD/TVI/CVI: 8M@15/12.5fps	Yes

AI Wi-Fi Camera**EQY Series(Wi-Fi)**

- Lens:4mm
- Waterproof: IP66
- Dual light night vision
- Audio intercom (support mic&speaker)
- Wi-Fi
- Support human detection

Model	Lens	Light Board	Resolution
EQY-3W-GS	4mm	Dual light	3MP
EQY-4W-GS	4mm	Dual light	4MP

EQY Series

- Lens: 2.8mm/4mm
- Waterproof: IP66
- Dual light night vision
- Audio intercom (support mic&speaker)
- Wi-Fi+RJ45 port
- Support human detection

Model	Lens	Light Board	Resolution
EQY-3WL-GM	2.8mm/4mm optional	Dual light	3MP
EQY-4WL-GM	2.8mm/4mm optional	Dual light	4MP

EHA Series

- Lens:4mm
- Waterproof: IP66
- Dual light night vision
- Audio intercom (support mic&speaker)
- Wi-Fi + RJ45 port
- Support human detection

Model	Lens	Light Board	Resolution
EHA-3WL-GM	4mm	Dual light	3MP
EHA-4WL-GM	4mm	Dual light	4MP

HX Series

- Lens: 2.8mm/4mm
- Dual light night vision
- Audio intercom (support mic&speaker)
- Wi-Fi + RJ45 port
- Support human detection

Model	Lens	Light Board	Resolution
HX-3WL-GM	2.8mm/4mm optional	Dual light	3MP
HX-4WL-GM	2.8mm/4mm optional	Dual light	4MP

AI Wi-Fi PT Camera**RY Series(Wi-Fi)**

- Lens: 4mm
- Adjust angle: Horizontal 355 °, vertical 110 °
- Infrared night vision
- Audio intercom (support mic&speaker)
- Bluetooth pairing, Wi-Fi connection
- Support human detection,human tracking

Model	Lens	Light Board	Resolution
RY-3W-GSH	4mm	Infrared light	3MP
RY-4W-GSH	4mm	Infrared light	4MP

RY Series(Wi-Fi+RJ45 port)

- Lens: 4mm
- Adjust angle: Horizontal 355 °, vertical 110 °
- Infrared night vision
- Audio intercom (support mic&speaker)
- Wi-Fi + RJ45 port
- Support human detection,human tracking

Model	Lens	Light Board	Resolution
RY-3WL-GMH	4mm	Infrared light	3MP
RY-4WL-GMH	4mm	Infrared light	4MP

RE Series

- Lens: 4mm
- Adjust angle: Horizontal 342.8°,vertical 95°
- Dual light night vision
- Audio intercom (support mic&speaker)
- Bluetooth pairing, Wi-Fi connection
- Support human detection,human tracking

Model	Lens	Light Board	Resolution
RE-3W-GS	4mm	Dual light	3MP
RE-4W-GS	4mm	Dual light	4MP

R Series PT Camera

- Lens: 4mm
- Audio intercom (support mic&speaker)
- Bluetooth pairing, Wi-Fi connection
- Support human detection/ human tracking

Model	Lens	Light Board	Resolution
DR-3WL-GM	4mm	Dual light	3MP

AI 4G Camera**R Series PT Camera**

- Lens: 4mm
- Audio intercom (support mic&speaker)
- Bluetooth pairing, Wi-Fi connection
- Support human detection, human tracking
- Support dual-light alert
- Support push alarm message to mobile phone
- Support TF card/cloud storage
- IP66 waterproof

Model	Lens	Light Board	Resolution	Connect
DR-5GL-GM	4mm	Dual light	5MP	4G
DR-3GL-GS	4mm	Dual light	3MP	4G

R Series Dual Lens Bullet&PT Camera

- Lens: 4mm+6mm
- Support monitoring two different areas, dual-screen preview
- Support human detection,human tracking
- Support dual-light alert, full-color night vision, infrared night vision
- Support push alarm message to mobile phone
- Support TF card/cloud storage
- IP66 waterproof

Model	Lens	Light Board	Resolution	Connect
DR-6GLXMD2	4mm+6mm	Dual light	6MP	4G

RF Series

- Lens: 4mm
- Adjust angle: Horizontal 342.8°,vertical 180°
- Dual light night vision
- Audio intercom (support mic&speaker)
- Bluetooth pairing, Wi-Fi connection
- Support human detection,human tracking

Model	Lens	Light Board	Resolution
RF-3W-GS	4mm	Dual light	3MP
RF-4W-GS	4mm	Dual light	4MP

R Series AOV Bullet&PT Camera

- Lens: 4mm+6mm
- 4G AOV All-day recording
- Solar power charging
- Two-channel Monitoring
- Built-in lithium battery
- Black light in full color
- Audio intercom (support mic&speaker)
- Bluetooth pairing, Wi-Fi connection
- Support human detection,human tracking

Model	Lens	Light Board	Resolution	Connect
DR-4GS-RSD2R	4mm+6mm	Warm light	4MP	4G

PRODUCT CATALOG



HANGZHOU JFTECH CO., LTD.



iCSee

About JF
HANGZHOU JFTECH CO., LTD.

Intelligent Internet of Things

Integrated Solution Provider with Video + IoT as the Core



Company Profile

R&D Center


Hangzhou, Nanjing, Chengdu Office area 6000+m², Employees 1000+;
R&D personnel 500+, 20+ National office; 80+ Product exporting countries



Production base




Advantage

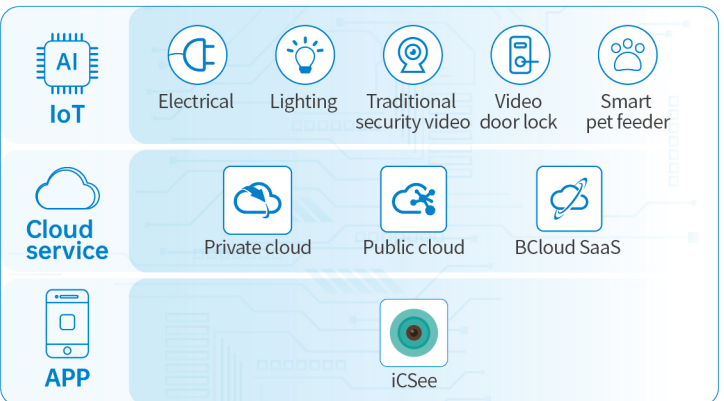


Independent Research and Development

Strong comprehensive research and development capabilities and platform architecture capabilities

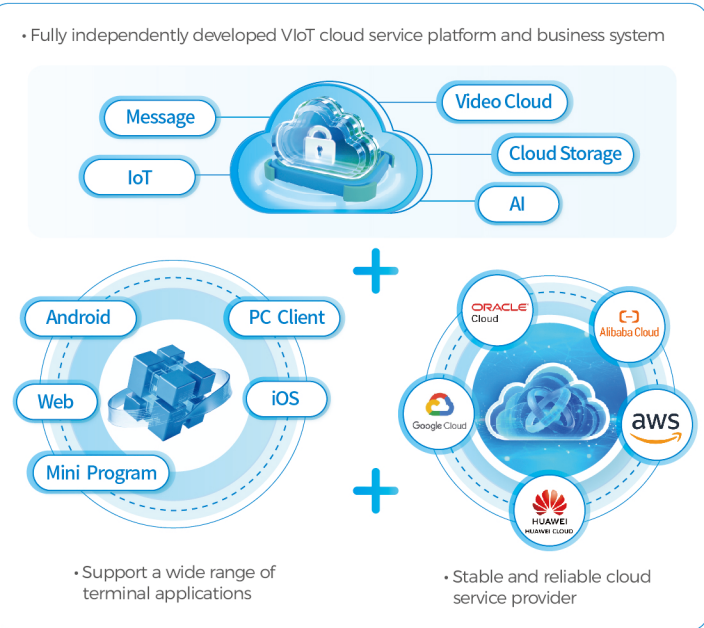


Over 4200 cloud host clusters


Global distributed deployment of cloud services, excellent connectivity stability, ensures fast and stable access to monitoring devices wherever there is a network.

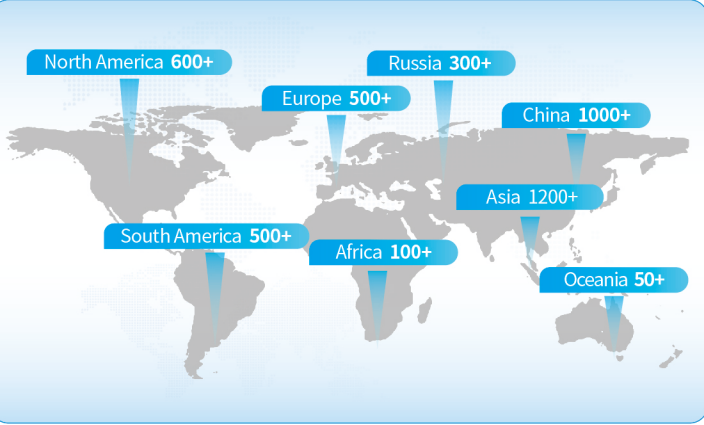


Powerful cloud service capabilities

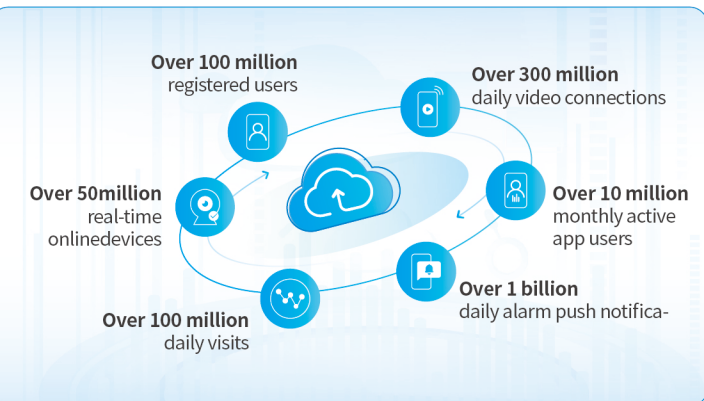

AI Algorithm Market Brings Strong Business Growth

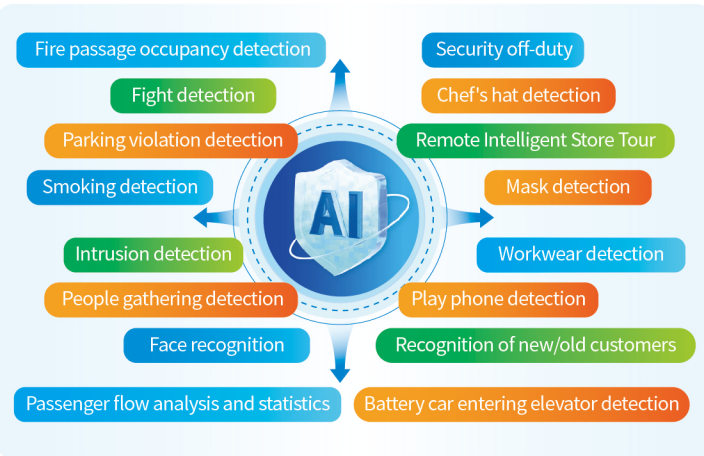


Value added service

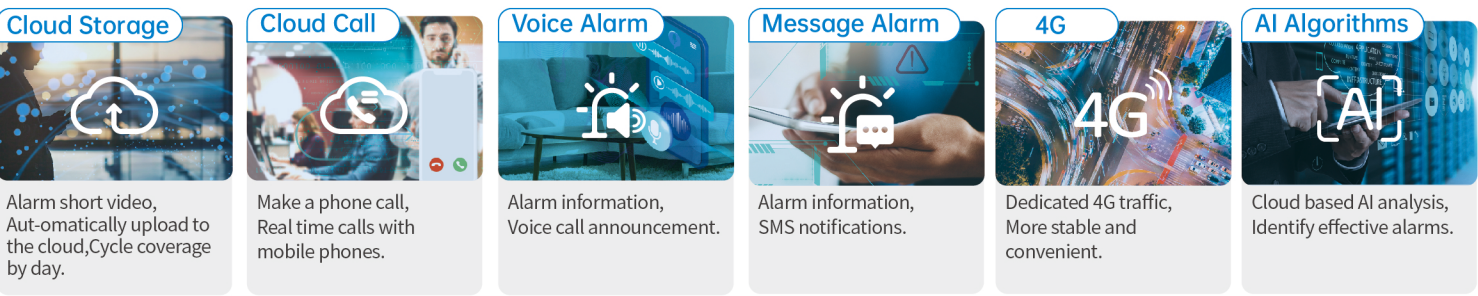

Jaify Large Model

The visual language large model platform, based on massive industry data and large-scale pre trained models, provides excellent visual cognitive abilities and customized solutions to empower thousands of industries.

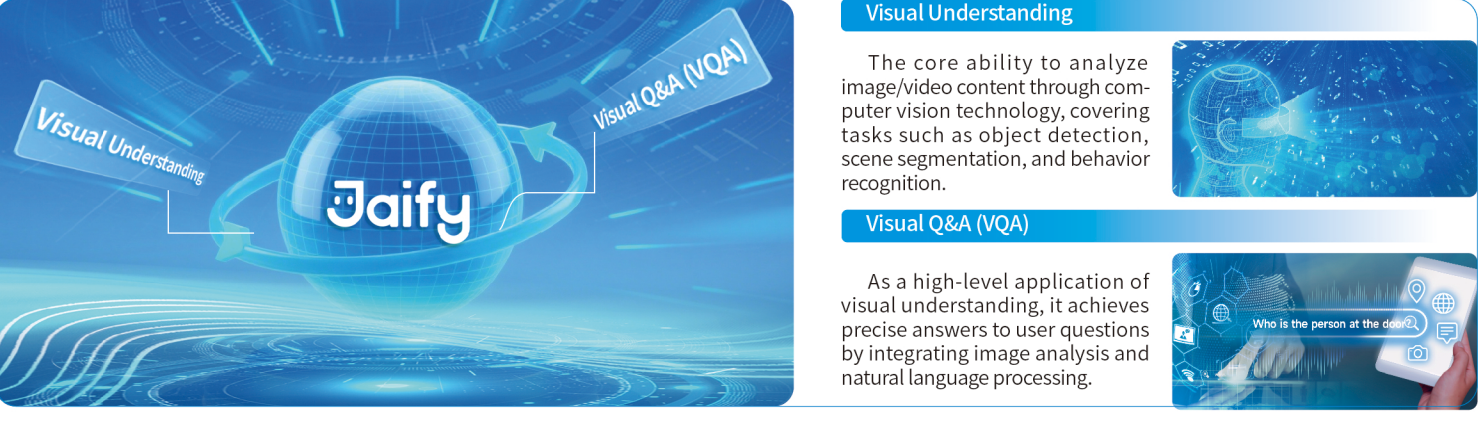

AI PoE IP Camera

HX Series

- Lens: 2.8mm/3.6mm optional
- Audio intercom (mic&speaker)
- Support human/face detection

Model	Lens	Light Board	Resolution
HX-3P-GM	2.8mm/3.6mm optional	Dual light	3MP
HX-4P-GM	2.8mm/3.6mm optional	Dual light	4MP

HN Series

- Lens: 2.8mm/3.6mm optional
- Support human/face detection
- Waterproof: IP66

Model	Lens	Light Board	Resolution
HN-3P-GS	2.8mm/3.6mm optional	Dual light	4MP
HN-5P-GS	2.8mm/3.6mm optional	Dual light	5MP
IPC-HM8580PNF-IR2R-PAT	2.8mm/3.6mm optional	Dual light	8MP

International certification guarantee



EQY Series

- Lens: 2.8mm/3.6mm optional
- Waterproof: IP66
- Audio intercom (mic&speaker)
- Support human/face detection

Model	Lens	Light Board	Resolution
EQY-3P-GM	2.8mm/3.6mm optional	Dual light	3MP
EQY-4P-GM	2.8mm/3.6mm optional	Dual light	4MP

H.265 4K PoE NVR

AY Series

- Mini-1U case; 1*SATA (Up to 14TB)
- 1*HDMI, 1*VGA
- Audio 1/1(3.5mm)
- Support cloud storage
- Support Multi lens camera
- Customization screen segmentation
- Support video playback by face and vehicle
- Support expansion of 433 modules to connect IoT devices

Model	Video Input	Decode(real-time and non-real-time)	PoE Ports
NVR8904AY-SKL	4*POE IPC+12*IPC	4K(1)/5M(1+1)/4M(2+1)/3M(2+2)/1080P(4+1)	4*POE
NVR8908AY-SKL	8*POE IPC+8*IPC	4K(1)/5M(1+1)/4M(2+1)/3M(2+2)/1080P(4+1)	8*POE

H.265 4K Non-PoE NVR

SY Series

- Mini-1U case, 1*SATA (Up to 14TB)
- 1*HDMI, 1*VGA
- Audio 1/1(3.5mm)
- Support cloud storage
- Support Multi lens camera
- Customization screen segmentation
- Support video playback by face and vehicle
- Support expansion of 433 modules to connect IoT devices

Model	Video Input	Decode(real-time and non-real-time)
NVR8010SY-SKL	10*4K IPC	4K(1)/5M(1+1)/4M(2)/3M(2+2)/1080P(4+1)
NVR8016SY-SKL	16*4K IPC	4K(1)/5M(1+1)/4M(2)/3M(2+2)/1080P(4+1)

FM Series

- 1.5U case, 4*SATA (Each up to 14TB)
- 1*HDMI, 1*VGA
- Audio 1/1(3.5mm)
- Support cloud storage
- Support Multi lens camera
- Support video playback by face and vehicle

Model	Video Input	Decode(real-time and non-real-time)
NVR8036FM-NKL-V3	36*4K IPC	4K(1+1)/5M(3+1)/4M(4+1)/3M(5+1)/1080P(8+2)

ES Series

- Lens: 2.8mm/3.6mm optional
- Audio intercom (support mic&speaker)
- Support human/face/vehicle detection
- Waterproof: IP67
- Dual light night vision

Model	Lens	Light Board	Resolution
ES-3P-GY	2.8mm/3.6mm optional	Dual light	3MP
ES-4P-GS	2.8mm/3.6mm optional	Dual light	4MP
ES-5P-GS	2.8mm/3.6mm optional	Dual light	5MP
ES-6P-GY	2.8mm/3.6mm optional	Dual light	6MP
ES-8P-NS	2.8mm/3.6mm optional	Dual light	8MP

EM Series

- 1U case; 2*SATA (Each up to 14TB)
- 1*HDMI, 1*VGA
- Audio 1/1(3.5mm)
- Support cloud storage
- Support Multi lens camera
- Customization screen segmentation
- Support video playback by face and vehicle

Model	Video Input	Decode(real-time and non-real-time)	PoE Ports
NVR8916EM-NKL-V3	16*POE IPC	4K(1+1)/5M(3+1)/4M(4+1)/3M(5+1)/1080P(8+2)	16*POE

KM Series

- 2U case, 8*SATA(Each up to 14TB)
- 2*HDMI, 1*VGA
- Audio 1/1, Alarm 16/4
- Support cloud storage
- Support Multi lens camera
- Support video playback by face and vehicle

Model	Video Input	Decode(real-time and non-real-time)
NVR8036KM-NKLE	36*4K IPC	4K(1+1)/5M(3+1)/4M(4+1)/3M(5+1)/1080P(8+2)
NVR8064KM-NKLE	64*4K IPC	4K(1+1)/5M(3+1)/4M(4+1)/3M(5+1)/1080P(8+2)

MY Series

- 1.5U case, 2*SATA (Each up to 14TB)
- 1*HDMI, 1*VGA
- Audio 1/1(3.5mm)
- Support cloud storage
- Support Multi lens camera
- Support video playback by face and vehicle

Model	Video Input	Decode(real-time and non-real-time)
NVR8036MY-NKL-V3	36*4K IPC	4K(1+1)/5M(3+1)/4M(4+1)/3M(5+1)/1080P(8+2)

AI ADVR

A Series

- Mini-1U case, 1*SATA (Up to 14TB)
- 1*HDMI, 1*VGA
- Coaxial audio
- Support cloud storage
- Support video playback by face and vehicle
- Support expansion of 433 modules to connect IoT devices

Model	Encode	Decode
ADVR8004A-NMH-V4	4*5M-N@20fps(6 in 1)/4*4M-N@25fps(6 in 1)/2*1080P@25fps(6 in 1), default:5M-N	2*5M-N@20fps(6 in 1)/2*4M-N@25fps(6 in 1)/2*1080P@25fps(6 in 1), default:5M-N
ADVR8008A-NLME-V4	8*5M-N@12fps(6 in 1)/8*4M-N@15fps(6 in 1)/8*1080P@15fps, default:5M-N	2*5M-N@12fps(6 in 1)/2*4M-N@15fps(6 in 1)/2*1080P@15fps, default:5M-N
ADVR8016A-NLME-V4	16*5M-N@6fps(6 in 1)/16*4M-N@8fps(6 in 1)/16*1080P@8fps(6 in 1), default:5M-N	6*5M-N@6fps(6 in 1)/6*4M-N@8fps(6 in 1)/6*1080P@8fps(6 in 1), default:5M-N
ADVR8004A-NGS-V4	4*4K-N@12fps(6 in 1)/4*4M@15fps(6 in 1)/4*3M@25fps(6 in 1)/4*1080P(6 in 1), default:4K-N	1*4K-N@12fps(6 in 1)/1*4M@15fps(6 in 1)/1*3M@18fps(6 in 1)/1*1080P, default:4K-N
ADVR8008A-NGS-V4	8*4K-N@9fps(6 in 1)/8*5M@8fps(6 in 1)/8*4M@10fps(6 in 1)/8*3M@12fps(6 in 1)/8*1080P(6 in 1), default:4K-N	8*4K-N@9fps(6 in 1)/8*5M@8fps(6 in 1)/8*4M@10fps(6 in 1)/8*3M@12fps(6 in 1)/8*1080P@18fps(6 in 1), default:4K-N
ADVR8016A-NGS-V4	16*4K@4fps(6 in 1)/16*5M@6fps(6 in 1), default:8M	4*4K@4fps(6 in 1)/16*5M@6fps(6 in 1), default:8M
ADVR8004A-NGL-V4	4*8M@8fps(6 in 1)/4*5M@16fps(6 in 1)/4*4M@21fps(6 in 1)/4*3M@25fps(6 in 1)/4*1080P(6 in 1), default:8M	4*8M@8fps(6 in 1)/4*5M@16fps(6 in 1)/4*4M@21fps(6 in 1)/4*3M@25fps(6 in 1)/4*1080P(6 in 1), default:8M
ADVR8008A-NGL-V4	8*8M@8fps(6 in 1)/8*5M@14fps(6 in 1)/8*4M@18fps(6 in 1)/8*3M@21fps(6 in 1)/8*1080P(6 in 1), default:8M	8*8M@8fps(6 in 1)/8*5M@14fps(6 in 1)/8*4M@18fps(6 in 1)/8*3M@21fps(6 in 1)/8*1080P(6 in 1), default:8M

FM Series

- 2U case, 4*SATA (Each up to 14TB)
- 1*HDMI, 1*VGA
- Audio 16/1, Alarm 16/4
- Coaxial audio

Model	Encode	Decode
ADVR8032FM-NLME-V4	32*5M-N@6fps(6 in 1)/32*4M-N@8fps(6 in 1)/32*1080P@8fps, default:5M-N	8*5M-N@6fps(6 in 1)/16*4M-N@8fps(6 in 1)/16*1080P@8fps, default:5M-N

Coaxial Camera

EQS Series

- Lens: 2.8mm/3.6mm optional
- Waterproof: IP67
- Transmission distance over 500 meters
- Support human/face/vehicle detection with ADVR

Model	Lens	Light Board	Resolution
AHC-EQ55320PTA-X-IR2R	2.8mm/3.6mm optional	Dual light	XVI/AHD/TVI/CVI: 1080P@25fps, CVBS:960H
AHC-EQ55350PSC-X-IR2R	2.8mm/3.6mm optional	Dual light	XVI/AHD/TVI:5MP@20fps, 5MP@12.5fps, CVI:5MP@20fps
AHC-EQ55380PTA-X-IR2R	2.8mm/3.6mm optional	Dual light	XVI/AHD/TVI/CVI:8MP@15fps

HS Series

- Lens: 2.8mm/3.6mm optional
- Transmission distance over 500 meters
- Support human/face/vehicle detection with ADVR

Model	Lens	Light Board	Resolution
AHC-HS5320PTA-X-IR2R	2.8mm/3.6mm optional	Dual light	XVI/AHD/TVI/CVI:1080P@25fps, CVBS:960H
AHC-HS5350PSC-X-IR2R	2.8mm/3.6mm optional	Dual light	XVI/AHD/TVI:5MP@20fps, 5MP@12.5fps, CVI:5MP@20fps
AHC-HS5380PTA-X-IR2R	2.8mm/3.6mm optional	Dual light	XVI/AHD/TVI/CVI:8MP@15fps